



SHANGHAI KUKO PACKING MACHINERY CO., LTD.

Add: No.408, Tianjiu Road, Songjiang District, Shanghai, 201603, China

Tel: +86-(0)21-6974 6020

Fax: +86-(0)21-6221 9769

E-mail: info@goodpacking.com.cn

<http://www.goodpacking.com.cn>

Fully-auto Cold Stretch Hooding Machine




Product Features

- For 60 ~ 200 micron thickness PE stretch hood film;
- The products which are packaged together by the film are very suitable for transportation. And it can effectively prevent product shedding;
- Stretch hood film offers higher transparency than traditional PE film, ensuring barcodes and trademarks are clearly visible, which enhance the product's advertising and visual display value;
- The film sealed on the top becomes a bag which can protect the products better;
- Easy servicing: The unique feature of lowering the top stretch system of the machine descends to floor level for even easier, faster and safer service and maintenance. Film rolls replacement take place at floor level by automatic lifting;
- The Space saving: Space is often at a premium in today's production especially in the small production area. Specially designed for operating efficiency and reliability with energy-saving features;


- Cold stretch hood film doesn't need heat energy. It is very eco-friendly and keep the products away from water, dust and UV rays;
- The packaging speed is about 50~80 pallets/hour, which can improve packaging efficiency and save labor;
- The conveyor can be chain, chain plate or roller type;
- Film saving: The top film unwinding feature saves up to 10% film and ensure slow film consumption. It eliminates fragile film on the loading corner and makes the film approx. 30% thicker than normal on the corners of the pallet;
- The upright packing power is strong; when the pallet leans the items keep
- Standing;
- Energy Conservation: Sustainable development and ecological protection are a global priority. We take concrete actions to deliver more eco-friendly packaging solutions.

Layout

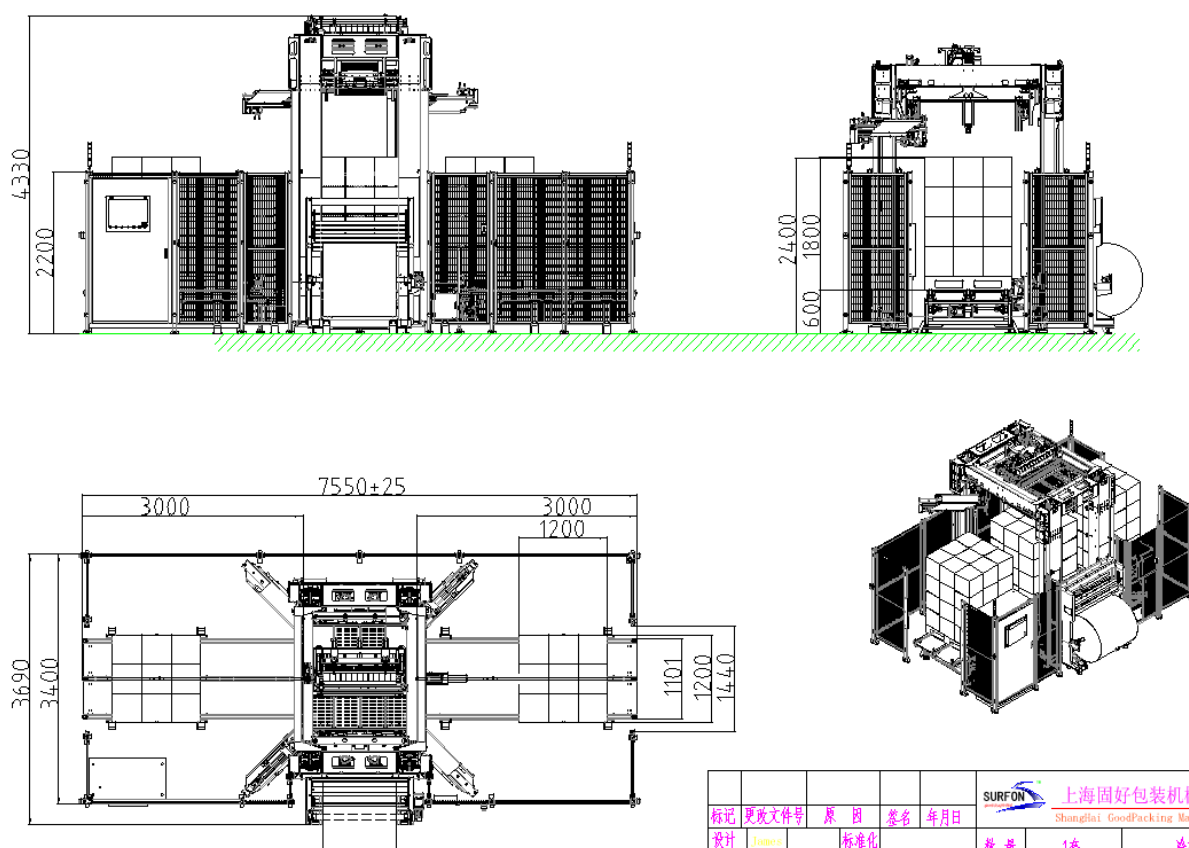

标记	更改文件号	原因	签名	年月日	SURFON 上海固好包装机械有限公司 Shanghai GoodPacking Machinery co., Ltd.		
设计	Jones	标准化			数量	1套	冷拉伸业务指导图
校对	Jones	单位			材料	A3烤漆	FA-240321
批准		日期			共	张	第 张
工艺		比例					方案图

Working Flow

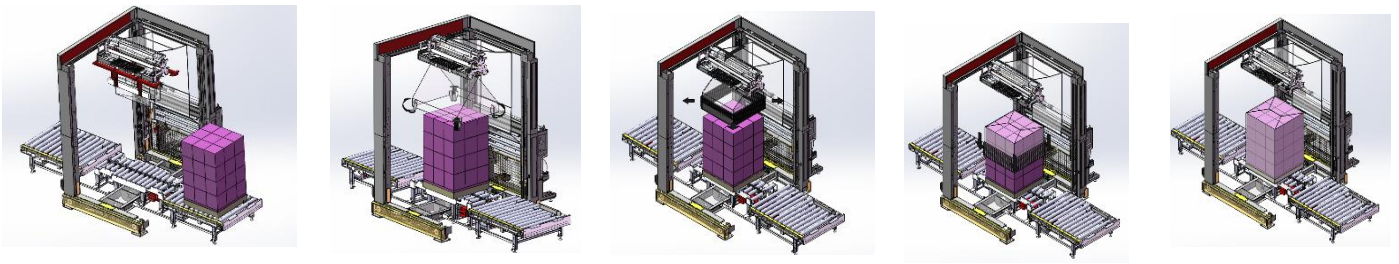

Specification

Model	SF-CS	External Air Source	5~8 bar
Power	16.5 kw	Power Supply	AC 380/ 220V 3PH 50/60Hz
Max Packing Size L x W x H	1200 x 1200 x 1800 mm	External Air Source	5 ~ 8 Bar
Min. Packing Size L x W x H	700 x 500 x 800 mm	Max. weight of Film Roll	1000kgs
Packing Speed	50~80 pallets / hour	Applicable Film	PE Stretch Hood Film
Working Table Height	600±50mm	Machine Size Lx W x H	6700 x 4200 x 4250mm
Load Capacity	3000kgs	G./N. Weight	7200/6500kgs

SF-CS	Brand	Country
Battery case	Schneider	France
Remote Transmitter Module	Schneider	France
3KW Servo Drive	Schneider	France
Touch screen soft cable	Schneider	France
Inverter	Schneider	France
Cable	Schneider	France
12 inch touch screen	Schneider	France
0.75KW Servo Drive	Schneider	France
TM3 bus cable	Schneider	France
Analog expansion board	Schneider	France
Remote Receiver Module	Schneider	France
Termination Resistors	Schneider	France
2KW Servo Drive	Schneider	France
PLC	Schneider	France
Handheld touch screen	Schneider	France
Three-color light buzzer light	TEND	TEND
Yellow Reset button	Schneider	France
Green start button	Schneider	France
Red stop button	Schneider	France
Selector switch	Schneider	France
Contacts normally closed	Schneider	France
Emergency stop button	Schneider	France
Schneider AC Contactor	Schneider	France
Emergency stop yellow guard	Schneider	France
Safety Relay	Pilz	Germany
Isolation transformer	Tengen	China
Safety Light Curtain	Keyence	Japan
Absolute encoder	SICK	Germany



Distance sensor cable	SICK	Germany
-----------------------	------	---------

Distance sensor	SICK	Germany
-----------------	------	---------

Photos





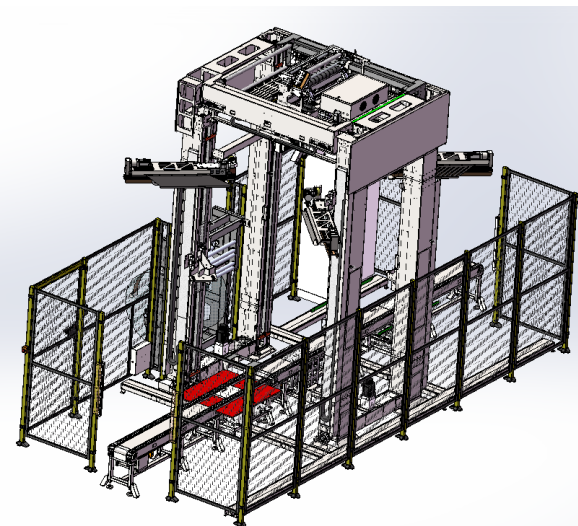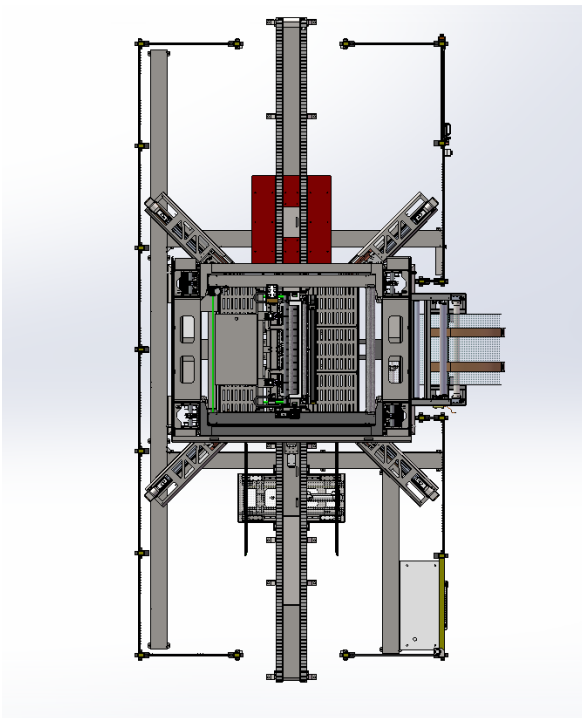

Shipment





AKKU 403746 8
45G1

MAX. GROSS 32.500 kg
71.650 lb

TARE 3.700 kg
8.160 lb

PAYLOAD 28.800 kg
63.490 lb

CU. CAP. 76.3 CU.M.
2.689 CU.FT.

G1979

1979