

GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All Diffused Structure
- . High Surge rating
- . Soft Reverse Recovery
- . Rugged Ceramic Hermetic Package
- . Pressure Assembled Device

Typical Applications:

- . Rectifier for Drives Applications
- . Medium voltage converters
- . Pulsed power applications
- . Crowbar Applications

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

V_{RRM} (1)	V_{RSM} (1)
600	600

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Notes:

All ratings are specified for $T_j=25^\circ\text{C}$ unless otherwise stated.


(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -40 to $+1850^\circ\text{C}$.

(2) 10 msec. max. pulse width

(3) Maximum value for $T_j = 150^\circ\text{C}$.

(4) See parameter definition below :

Repetitive peak reverse leakage	I_{RRM}	4 mA 100 mA
---------------------------------	-----------	----------------

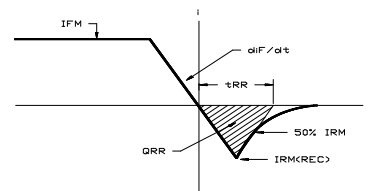

REVERSE RECOVERY CHARACTERISTIC

Conducting - on state

Parameter	Symbol	Min	Max.	Typ	Units	Conditions
Max. Average value of on-state current	$I_{F(AV)}$		7500		A	Sinewave, 180° conduction, $T_c=85^\circ\text{C}$
RMS value of on-state current	$I_{F(RMS)M}$		11800		A	Nominal value
Peak one cycle surge (non repetitive) current	I_{FSM}		60		kA	$T_j=25^\circ\text{C}$, $V_R=0,8V_{RRM}$, $t_p=10\text{ms}$
I square t	I^2t		18000		kA^2s	10 msec
Peak on-state voltage	V_{FM}		1.12		V	$I_{FM}=8000\text{ A}$; $T_j = 25^\circ\text{C}$
Threshold voltage	V_{F0}		0.70		V	$T_j = T_{j \text{ Max}}$
Slope resistance	r_f		0.038		$\text{m}\Omega$	$T_j = T_{j \text{ Max}}$
Reverse Recovery Charge (4)	Q_{rr}		-		μC	
Reverse Recovery Time (4)	t_{RR}		-	-	μs	

* For guaranteed maximum values, contact factory

THERMAL AND MECHANICAL CHARACTERISTICS

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	$+150$		$^\circ\text{C}$	
Storage temperature	T_{stg}	-40	$+150$		$^\circ\text{C}$	
Thermal resistance - junction to case	$R_{\theta(j-c)}$		0.009		$^\circ\text{C/kW}$	Double side cooled Single sided cooled
Thermal resistance - case to sink	$R_{\theta(c-s)}$		0.005 -		$^\circ\text{C/kW}$	Double side cooled Single sided cooled
Thermal resistance - junction to sink	$R_{\theta(j-s)}$		- -		$^\circ\text{C/kW}$	Double side cooled Single sided cooled
Mounting force	P	24	30		kN	
Weight	W			0.078	Kg	about

* Mounting surfaces smooth, flat and greased

CASE OUTLINE AND DIMENSIONS

